

240V, BS88-4 Semiconductor Fuse

Description 描述

- BS88-4 style stud-mount Fuse 螺栓安装类型熔断器
- High speed semi-conductor fuse 快速半导体熔断器
- 240Vac/150Vdc, IEC 60269-4/BS88-4/GB13539-4, Type A

Specifications 电气特性



Type 类型	Ordering P/N 订购料号	Electrical Characteristics				
		Rated Current (RMS-A)	Interrupting rating	Energy Integrals I^2t (A ² S)		
				Pre-Arcing	Clearing at 120V	Clearing at 240V
STLET	STLET-25	25	240Vac/50kA 150Vdc/10kA *	18	120	250
	STLET-40	40		75	430	900
	STLET-50	50		100	500	1400
	STLET-63	63		180	1100	2200
	STLET-80	80		300	1900	3800
	STLET-100	100		600	3800	7500
	STLET-125	125		600	3800	7500
	STLET-160	160		1100	7000	16000
	STLET-180	180		1600	12000	29000
	STLMT-160	160		1100	7000	16000
STLMT	STLMT-250	250		3200	20000	40000
	STLMT-315	315		6000	35000	75000
	STLMT-400	400		14000	71000	170000

- Power loss provided at rated current
- TUV certified STLET series for 150Vdc.
- For current rating other than above, please contact ASTM.

Dimension (mm)尺寸

Type: STLET

STLMT

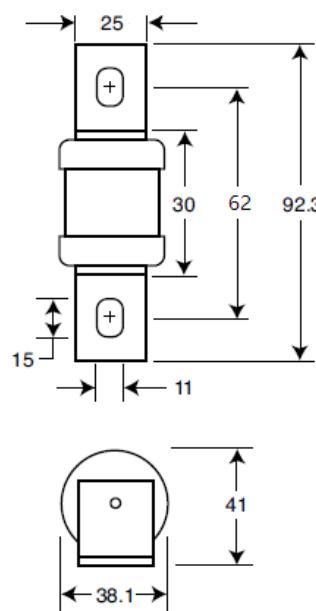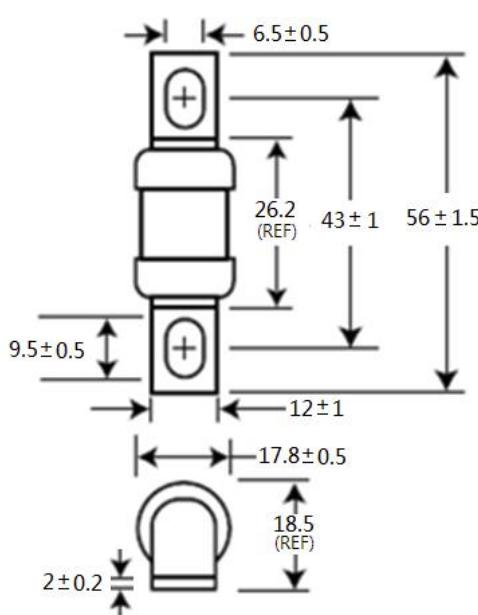

240V, BS88-4 Semiconductor Fuse

Electrical Characteristics 电气特性

Total Cleaning I ² t 焦耳积分值 I ² t	Arc Voltage 弧电压	Power Loss 功率损耗
<p>The total clearing I²t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g, (rms).</p> <p>电气特性中给出的总焦耳积分 I²t 是在额定电压和 15% 功率因素下所得。如果施加的电压不同，可以乘以校正因数 K 求得实际的 I²t。参阅下图中 K 与工作电压 E_g 的关系。</p> <p>1) LCT 2) LET, LMT, LMMT</p>	<p>This curve gives the peak arc voltage, U_L, which may appear across the fuse during its operation as a function of the applied working voltage, E_g, (rms) at a power factor of 15%.</p> <p>下图中的曲线说明了 15% 功率因数时施加的工作电压 E_g(RMS) 与工作时熔断器上可能出现的峰值弧电压 U_L 的函数关系。</p> <p>1) LCT 2) LET, LMT, LMMT</p>	<p>Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p, is given as a function of the RMS load current, I_b, in % of the rated current.</p> <p>以下电气特性曲线说明了额定电流时的功率损耗。根据曲线可以计算出负载电流低于额定电流时的功率损耗。校正因数 K_p 是负载率(RMS 负载电流 I_b 除以额定电流得出的百分比)的函数。</p>

Transportation and Storage 运输与储存

During transportation and storage, should avoid water seepage and mechanical damage. 运输与储存期间, 应避免雨雪侵蚀和机械损伤。

Conditions for operation in service 工作条件

Where the following conditions apply, fuses complying with this standard are deemed capable of operating satisfactorily without further qualification.

Normal temperature: -5°C to 40°C;

The altitude of the site of installation of the fuses does not exceed 2 000 m above sea level;

The air is clean and its relative humidity does not exceed 50 % at the maximum temperature of 40°C;

Higher relative humidities are permitted at lower temperatures, e.g. 90 % at 20°C;

Under these conditions, moderate condensation may occasionally occur due to variation in temperature.

For operation condition other than above, please contact manufacturer.

在以下条件下使用, 熔断器认为能正常工作, 不需要进一步验证:

周围空气温度:-5°C to 40°C;

安装地点的海拔不超过2000米;

空气是干净的, 其相对湿度在最高温度为40°C时不超过50%;

在较低温度下可以有较高的相对湿度, 例如, 在20°C时, 相对湿度可达90%;




240V, BS88-4 Semiconductor Fuse

在这些条件下,由于温度变化,可能偶然发生中等凝露.
如果使用条件超出以上范围,请咨询制造商以确认相应的折减计算.


Temperature Rerating Curve 温度调额曲线

Operating temperature: -50°C to 100°C;

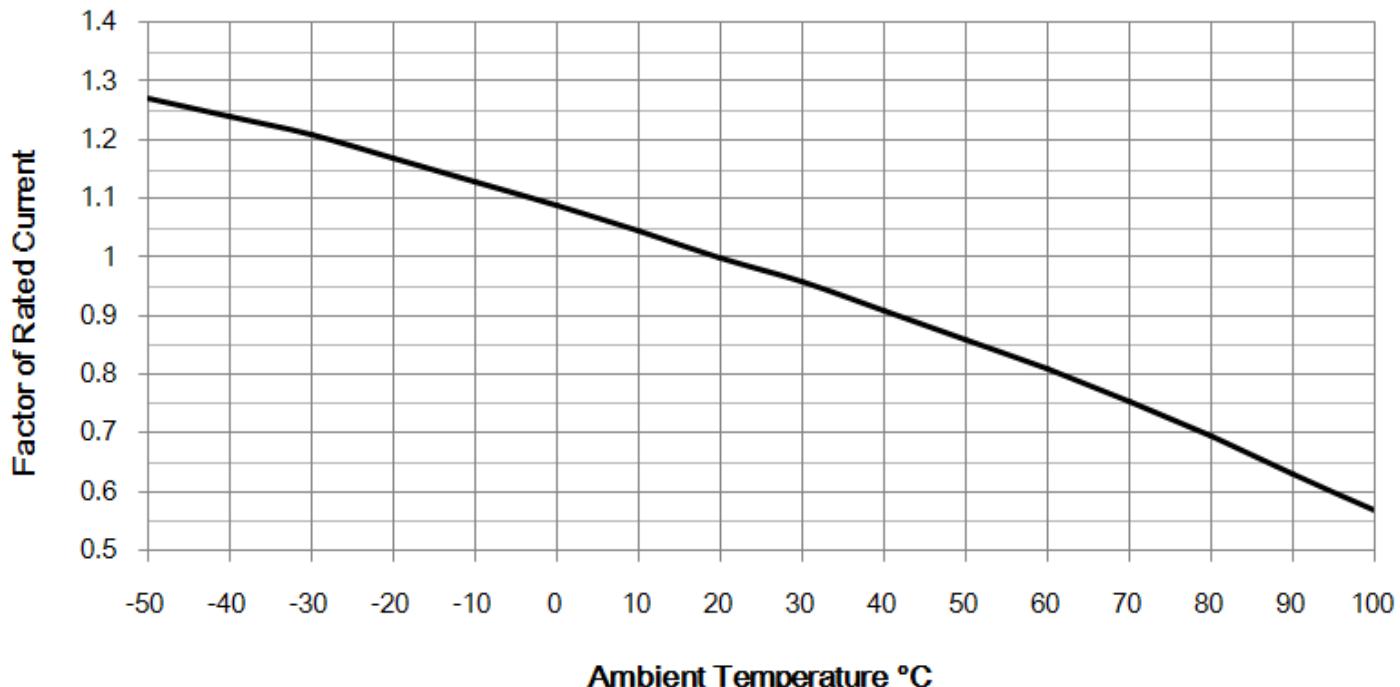

240V, BS88-4 Semiconductor Fuse

Time-Current Curve 时间电流曲线

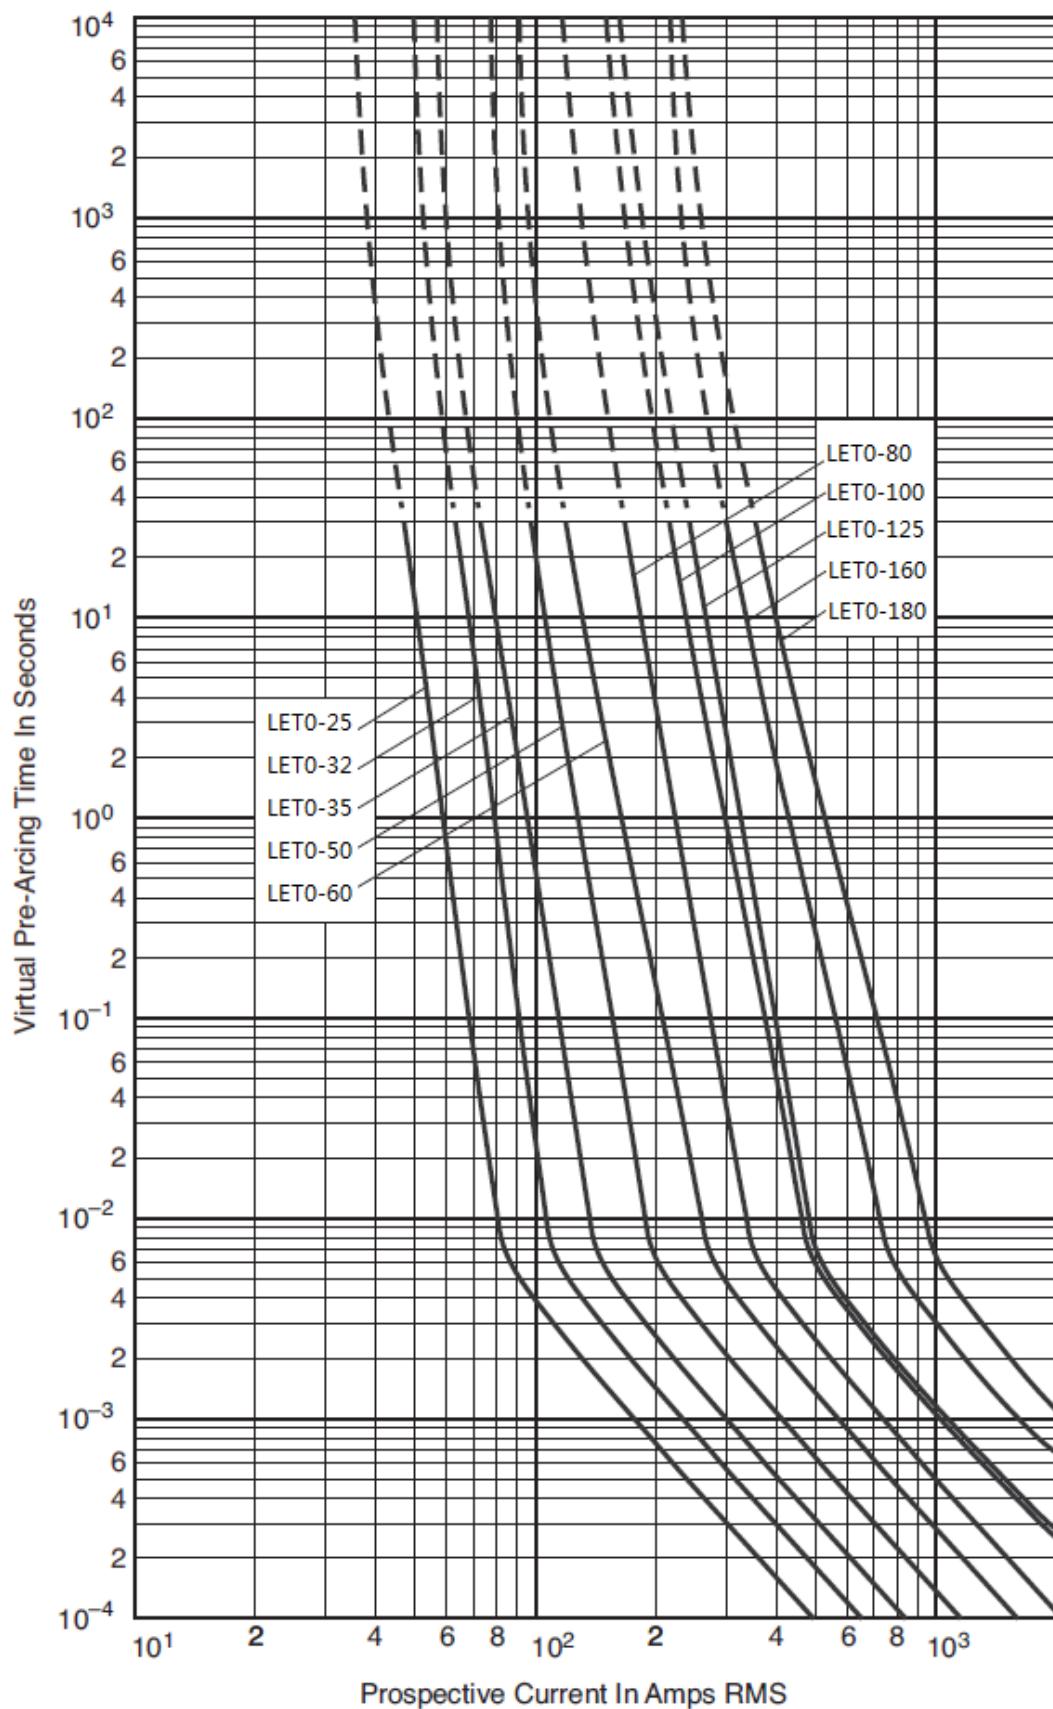



240V, BS88-4 Semiconductor Fuse

