


### Key Features

<b>EPIC® Seal</b>	Ceramic to metal braze. Gas filled hermetic chamber protects key components. Exceeds IP69K standard
<b>Temperature</b>	Tested to temperatures up to 200°C
<b>Contacts / Form</b>	Silver / SPST / NO
<b>Coil</b>	Optional efficient two coil design with no PWM or EMI emissions. Coil suppression built in
<b>High Shock and Vibration</b>	For rugged environments, off-road and tracked vehicles
<b>Installation</b>	Not direction sensitive
<b>Made in USA</b>	Designed and manufactured in the USA
<b>Reference</b>	MIL-R-6106, RoHS

**Current Carry vs Time**  
with 85°C terminal temperature rise

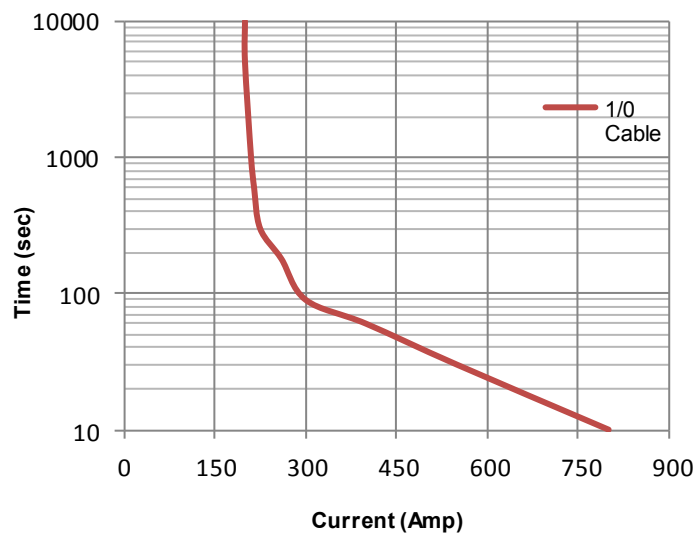

#### Power Terminals

Stainless M8 X 1.25 Stud  
Stainless M8 X 1.25 Nut  
Stainless Lock Washer  
Stainless Flat Washer

Torque 9-10 Nm [80-90 in-lb]

#### Mounting Hardware

M5 [No. 10] Bolts (not incl.)

Torque 2-4 Nm [18-35 in-lb]

#### Case Material

25% GF Nylon 6/6, UL 94 V-O

Technical Specification		Ordering Key							
Continuous Current	200A w/ 1/0 cable (see graph on reverse)	<div><div>MX32</div><div>D</div><div>Coil Voltage: <i>See table</i></div><div>Auxiliary Contacts: <i>Blank = none</i> <i>B = SPST, Normally Open</i></div><div>Coil Connection: <i>D = M4 Screws</i></div></div>							
Max Current—1 sec	1200A								
Max Current—10 sec	750A								
Max Current—90 sec	250A								
Contact Voltage Drop (max)	150mV at 200A								
Insulation Resistance (min)	100MΩ (50MΩ after life)								
Dielectric Withstanding	1500VRMS (1050 VRMS after life)								
Weight	1.0 lb with hardware (460 grams)								
Resistive Load Switching		Power Circuit and Installation							
200A at 24 VDC	100,000 cycles	<div><div><div><div>X1</div><div>X2</div></div><div><div>T1 (Aux NO)</div><div>T2 (Aux NO)</div></div><div><div>X1 (Coil +)</div><div>X2 (Coil -)</div></div></div><div><div>A2 (+)</div><div>A1 (-)</div></div><div><div>(Optional) Auxiliary contacts Normally Open</div><div><div>T2</div><div>T1</div></div></div><div><div>X2 (-)</div><div>X1 (+)</div></div></div>							
Mechanical Life	300,000 cycles								
Fault Interrupt @ 28VDC	1500A								
Environmental Specifications									
Seal	Hermetic, 10 E-9 atm cc/sec								
Temperature Range	-55°C to +100°C								
Shock	Sawtooth @ 20G, 11ms, ½ Sine @ 25G, 11ms								
Vibration	10-2000 Hz, 20G								
Water / Steam	2750 psi waterjet, 105 psi steam, boiling water								
Salt Spray Corrosion	MIL-STD-810G								
Resistant to corrosion, chemicals, and fungal growth									
Auxiliary contacts (optional) - Form A, SPST Normally Open									
Switching Current (max)	1A at 28VDC								
Switching Current (min)	0.1mA at 5V								
Coil Ratings at 25°C									
* S and T coil are dual coil design, all others are standard coils									
Coil P/N Designation	B	C	F	H	J	K	L	S *	T *
Coil Voltage, Nominal	12 VDC	24 VDC	48 VDC	72 VDC	120 VDC	120 VAC, 50/60Hz	240 VAC, 50/60Hz	12 VDC	24 VDC
Coil Voltage, Max	16 VDC	32 VDC	64 VDC	96 VDC	140 VDC	140 VAC	280 VAC	16 VDC	32 VDC
Pick-Up Voltage, Max	8 VDC	16 VDC	28 VDC	46 VDC	72 VDC	80 VAC	160 VAC	9 VDC	15 VDC
Drop-Out Voltage, Max	3 VDC	7 VDC	10 VDC	14 VDC	18 VDC	30 VAC	60 VAC	4.5 VDC	7 VDC
Drop-Out Voltage, Min	0.5 VDC	0.5 VDC	1.8 VDC	2.7 VDC	4.5 VDC	4.5 VAC	9 VAC	1 VDC	1.5 VDC
Pick-Up Current, Max (75ms)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	1.7 A	0.76 A
Coil Current	0.68 A	0.28 A	0.16 A	0.095 A	0.06 A	0.06 A	0.04 A	0.084 A	0.032 A
Coil Power	8 W	6.8 W	7.6 W	6.8 W	7.2 W	7.2 W	9.6 W	1 W	0.768 W
Operate Time, Max (incl.bounce)	20 msec	20 msec	30 msec	30 msec	20 msec	30 msec	30 msec	20 msec	20 msec
Release Time, Max	12 msec	12 msec	12 msec	12 msec	12 msec	50 msec	55 msec	12 msec	12 msec
Internal Coil Suppression	Transorb								
Coil Back EMF	55 V	55 V	80 V	115 V	175 V	N/A	N/A	55 V	55 V
Transients, Max (13ms)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	±50 V	±50 V
Reverse Polarity	N/A	N/A	N/A	N/A	N/A	N/A	N/A	16 V	32 V

Options and Accessories		GIGAVAC®		P.O. Box 4428 Santa Barbara, CA 93140
		<a href="http://www.gigavac.com">www.gigavac.com</a>	<a href="mailto:info@gigavac.com">info@gigavac.com</a>	+805-684-8401
		Rev 3	9/19/13	© 2013 GIGAVAC, LLC
		Page 2 of 2		MX32