

GR6FNA218

5 kV

No Load Switching





RoHS Compliant, date code 0701 and later



FEATURES
• RF efficient design offers high power handling in a small package.
• High voltage solder connections provide additional external isolation from PC boards.
• Mechanical life of 100 million operations is ideal for high speed, long life RF switching.
• Vacuum dielectric offers low stable contact resistance.

NOTES:

1. DIMENSIONS IN PARENTHESIS ARE IN MM.
2. PIN DIMENSIONS ARE .024 (.61) NOM. SQUARE.
3. RECOMMENDED PCB HOLES .043 (1.0).

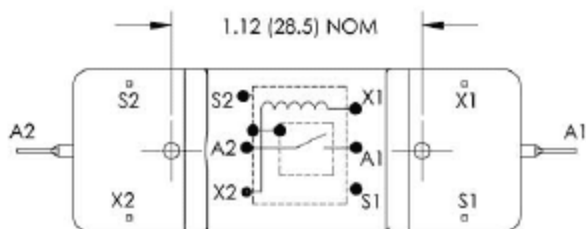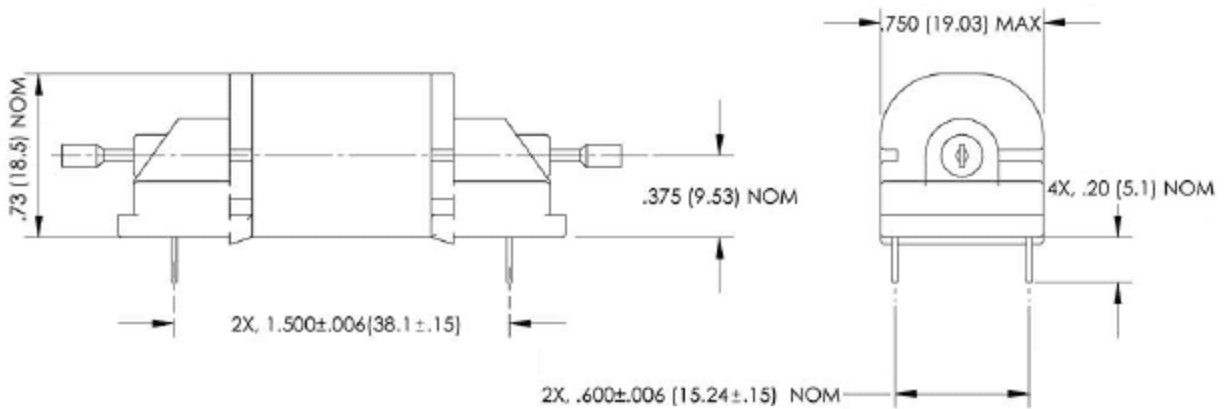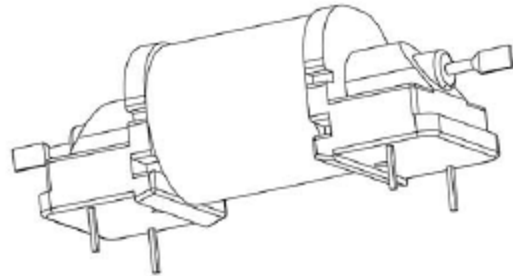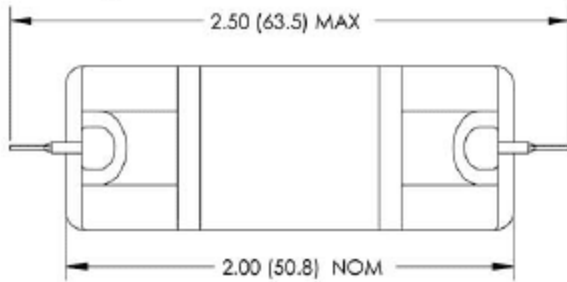

PRODUCT SPECIFICATIONS		
Contact & Relay Ratings	Units	GR6FNA218
Contact Form		A
Contact Arrangement		SPST-NO
Voltage Ratings		
Between Contacts	kV Peak	5
Contacts to Coil	kV Peak	5
Current Carry , Max.		
@ DC	Amps	8
@ 30 Mhz	Amps	6
Contact Resistance	Ohms	0.050
Capacitance		
Across Open Contacts	pF	0.6
Closed Contacts to Ground	pF	4
Initial Insulation Resistance	GigaOhms	10
Operate Time*	ms	3
Release Time*	ms	1
Mechanical Life	cycles	100 million
Weight, Nominal	g (oz)	24 (0.85)
Vibration, Operating, Sine(10-500 Hz Peak)	G's	20
Shock, Operating, 1/2 Sine 11ms (Peak)	G's	100
Temperature Range		
Operating	°C	-40 to +85
Storage	°C	-55 to +125

COIL RATINGS		
Volts, Nominal	Units	GR6FNA218
Volts, Nominal	Vdc	12
Voltage, Max.	Vdc	15
Pickup, Max.	Vdc	8
Dropout, Max.	Vdc	2
Coil Resistance	Ohms	480

*Operate and release times are with external diode suppression, @ 25°C.

For more information, refer to
[Relay User Instructions](#)

02/09/12



GIGAVAC® - P.O. Box 4428 - Santa Barbara, CA 93140-4428 - ph +(805) 684-8401 - +(805) 755-2000
fx +(805) 684-8402 - info@gigavac.com - www.gigavac.com - ©Copyright 2003-2012 GIGAVAC, LLC.